


www.tempLED.de

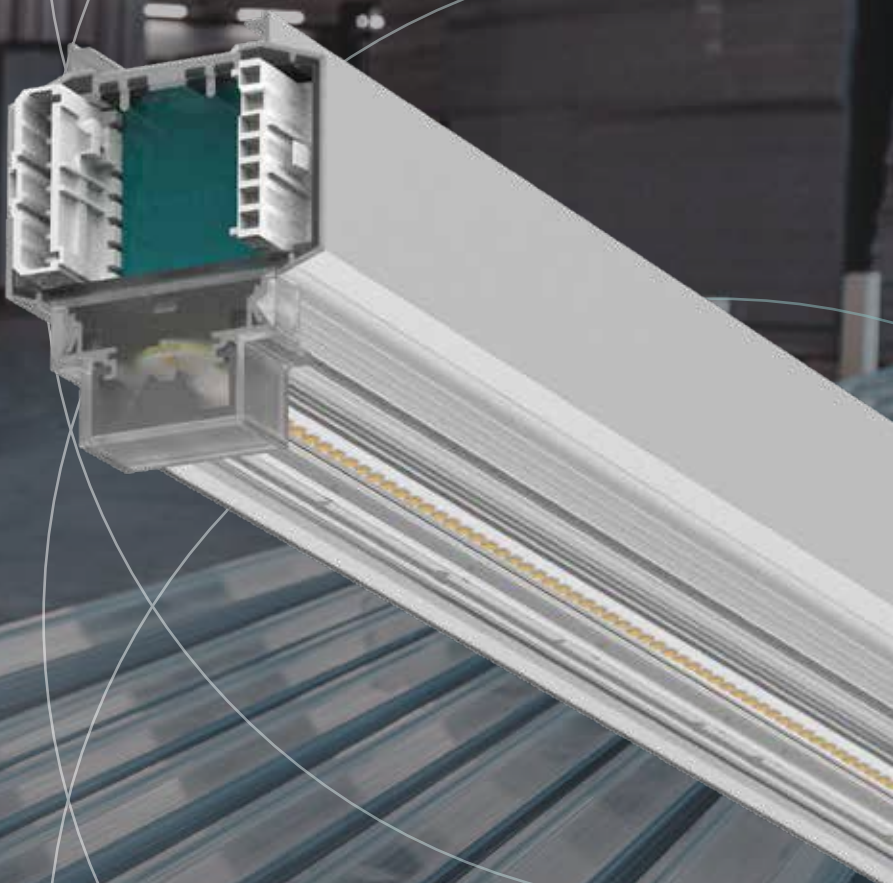

LINE LIGHTING SYSTEM

tempLED RayLine Max V3


20 | 35 | 60 | 90

HALL LIGHTS 

HIGH TEMPERATURES 


Our customer
Dinkhauser

tempLED

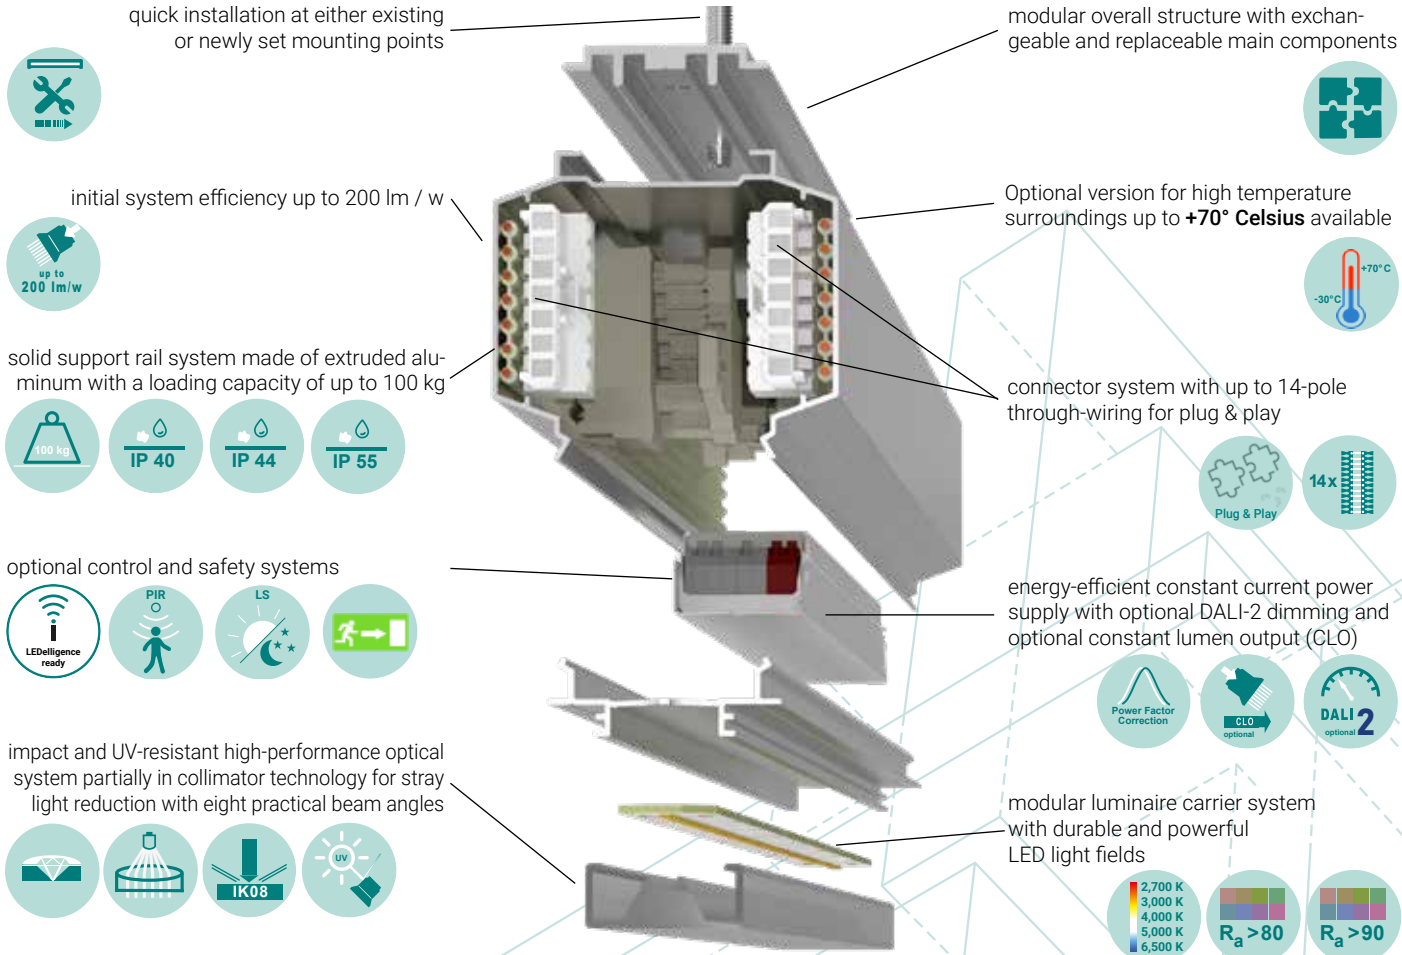


Light distribution curves tempLED RayLine Max V3


20 | 35 | 60 | 90

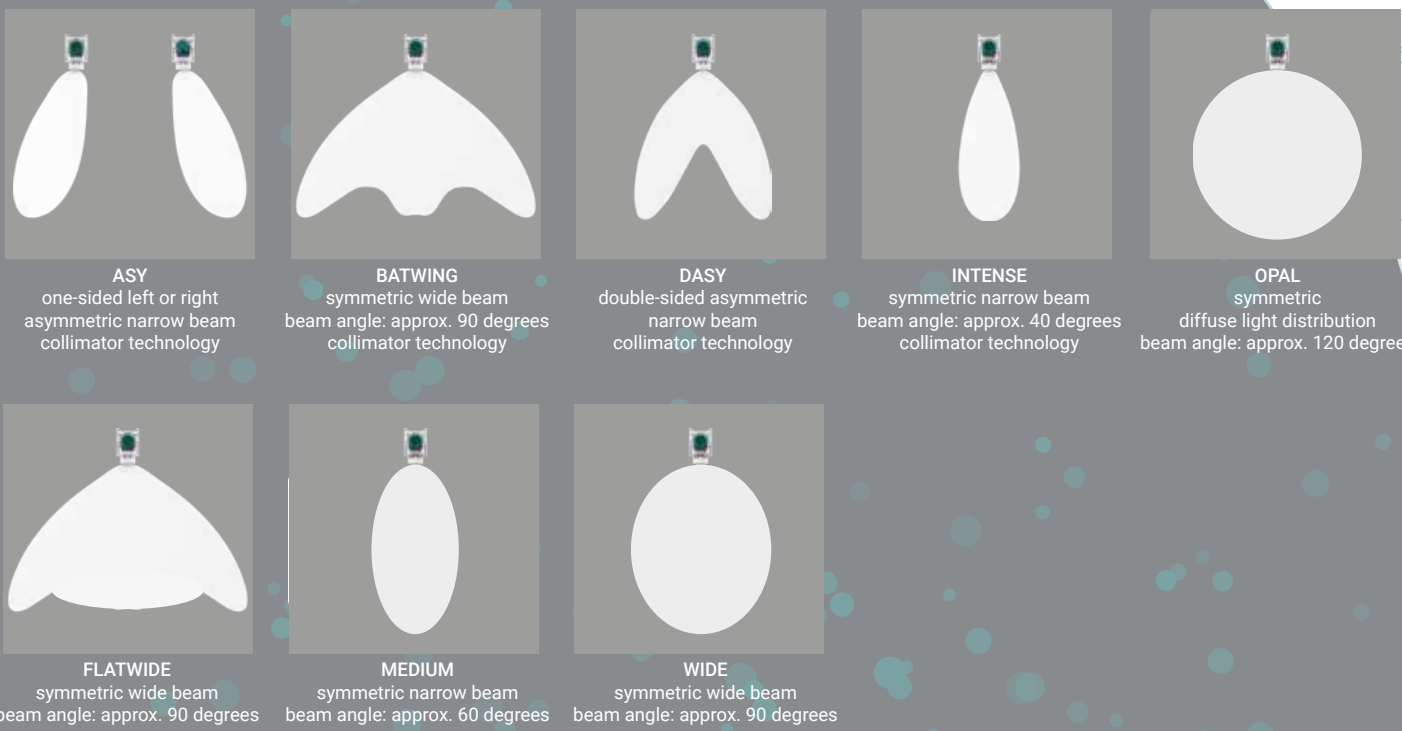

tempLED

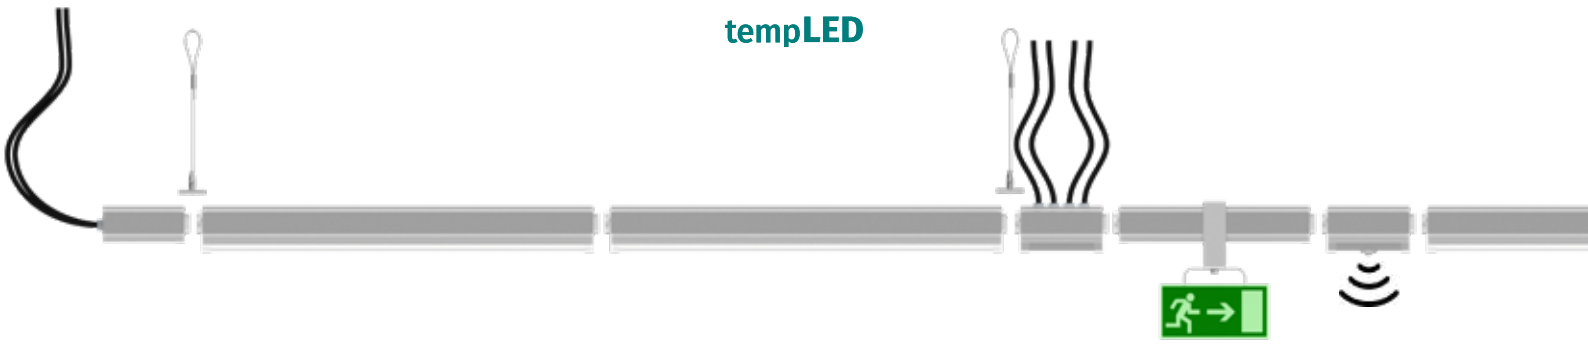

tempLED RayLine Max V3

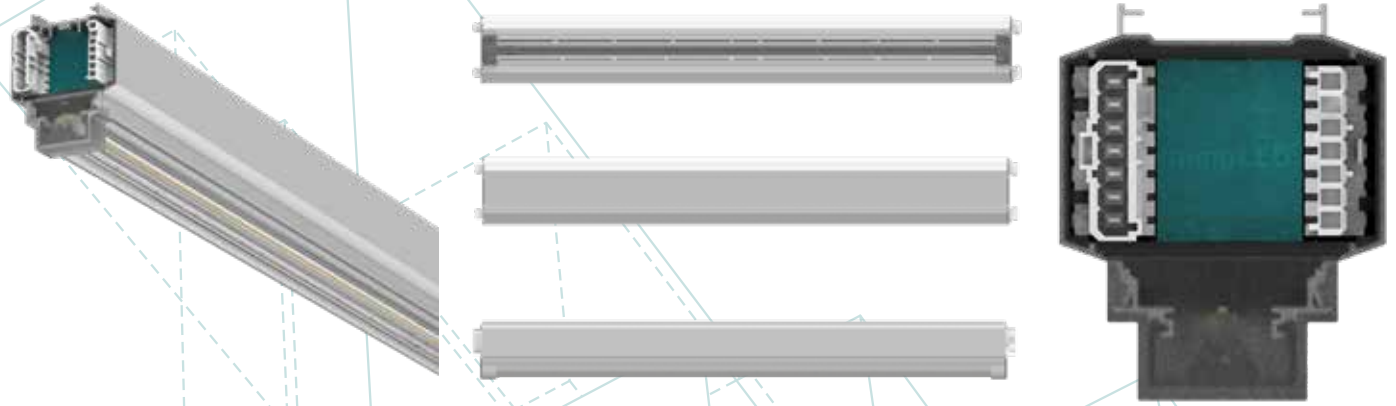

Dimensions tempLED RayLine Max V3

1,680 mm | 3,360 mm | 5,040 mm

1,680 mm



3,360 mm




5,040 mm



70.8 mm




84.2 mm




Mounting options tempLED RayLine Max V3


ceiling mounting
adapter

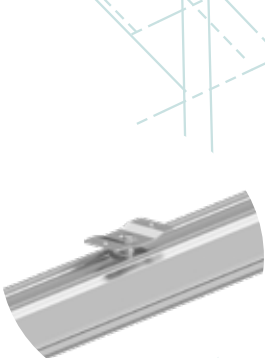


height-adjustable
rope suspension
(0.10 - 4.90 m)
combined with
loop




height-adjustable
rope suspension
(0.10 - 4.90 m)
combined with
carabiner hook



height-adjustable
rope suspension
(0.10 - 4.90 m)
combined with
trapezoidal sheet hook



height-adjustable
rope suspension
(0.10 - 4.90 m)
combined with
concrete anchor



General technical data

according to IEC, identical for all types of luminaires



Lighting properties:

initial luminous flux:	up to 16,650 lumens
luminous flux tolerance:	± 10 percent
initial system efficiency:	up to 200 lumens / watt
initial, most similar color temperature:	2,700 3,000 4,000 5,000 6,500 kelvins
initial color rendering index (CRI):	Ra > 80 Ra > 90
initial color consistency:	< 3 SDCM
available symmetric beam angles:	BATWING FLATWIDE INTENSE MEDIUM OPAL WIDE
available asymmetrical beam angles:	ASY (left- and right-sided) DASY
stray light reduction (depending on specific beam angles):	yes, with collimator technology
photobiological safety:	IEC/TR 62778: 1
compact flicker degree (CFD):	on request
stroboscopic visibility measurement (SVM):	on request
short time flicker (Pst LM):	on request

Electrotechnical properties:

power supply AC:	198 to 240 volts
supply frequency:	50 / 60 hertz
power supply DC:	176 to 250 volts
system performance:	20 to 90 watts
system performance tolerance:	± 10 percent
power factor:	> 0.95
overvoltage protection:	yes
overheating protection:	yes
temperature monitoring:	yes
total harmonic distortion (THD):	< 10 percent
temperature classification (ATEX):	T6
Tc - temperature:	+75 degrees Celsius
suitable for emergency light installations:	yes, in accordance with EN 60598-2-22 and IEC 61347-2-13, Annex J through DC detection (0 Hz, pulsating DC), can be switched on/off; on request: dimming to 15 percent of the nominal power in DC mode

Energy characteristics:

Valid for all tempLED RayLine Max V3 with up to 192 lumens per watt:	This product contains a light source of energy efficiency class B.
Valid for all tempLED RayLine Max V3 from 193 lumens per watt:	This product contains a light source of energy efficiency class A.

Mounting options:

mounting options:	ceiling mounting height-adjustable pendant mounting with cable suspension (0.10 to 4.90 m)
-------------------	---

Control and safety properties:

dimming:	DALI-2 optional
minimum dimming level:	10 percent
constant lumen output (CLO):	optional
emergency power module:	optional ¹
human centric lighting:	on request
daylight harvesting system:	optional ² (types with DALI dimming only)
motion control:	optional ² (types with DALI dimming only)

Housing properties:

standard ambient temperature:	-30 to +50 degrees Celsius
optional ambient temperature:	-30 to +70 degrees Celsius
ingress protection (depending on configuration):	IP 40 IP 44 IP 55
impact resistance level:	IK08
electrical protection class:	I
limited surface temperature (D):	yes
housing and heat sink material(s):	extruded aluminium profile
material of optical system:	impact- and UV-resistant PMMA
material of diffuser:	impact resistant polycarbonate
luminaire housing color:	aluminum natural ³
surface finish:	bare ³
supply cable inlet:	cable glands
standard number of poles with through-wiring:	10 [5 x 2.5 sqmm plus 5 x 1.5 sqmm]
optional number of poles with through-wiring:	12 [7 x 2.5 sqmm plus 5 x 1.5 sqmm] 14 [7 x 2.5 sqmm plus 7 x 2.5 sqmm]
maximum tensile load on the cover profile:	1.50 kilograms

Additional information:

certificates:	ENEC in preparation
conformities:	CE RoHS DIN 10500 (HACCP IFS) ⁴
lifespan (L70B10C1):	approx. 100,000 hours
lifespan (L90B10C1):	approx. 50,000 hours
guarantee:	5 years ⁵
spare part guarantee:	10 years
delievery includes:	prefabricated luminaire
base item number:	666000

¹ can only be used at ambient temperatures from +5 to +50 degrees Celsius. ² please note the ambient temperatures of the sensor systems.


³ optional luminaire housing colors and finishes: Paintings according to RAL colour chart, powder coatings according to RAL colour chart or synthetic resin coating.

⁴ DIN 10500 only valid for luminaires with opal polycarbonate diffuser and ingress protection IP 44 or IP 55. ⁵ according to the warranty conditions of tempLED GmbH, excluding accessories.

Logistic information:

maximum weight per mounting rail unit with 1,68 meter length:	approx. 4,200 g
maximum weight per mounting rail unit with 3,36 meter length:	approx. 8,000 g
maximum weight per mounting rail unit with 5,04 meter length:	approx. 12,000 g
amount of line meter per wooden box:	105,84
dimensions per wooden box L x W x H:	5,131 x 784 x 425 mm
net weight per wooden box:	20,000 g



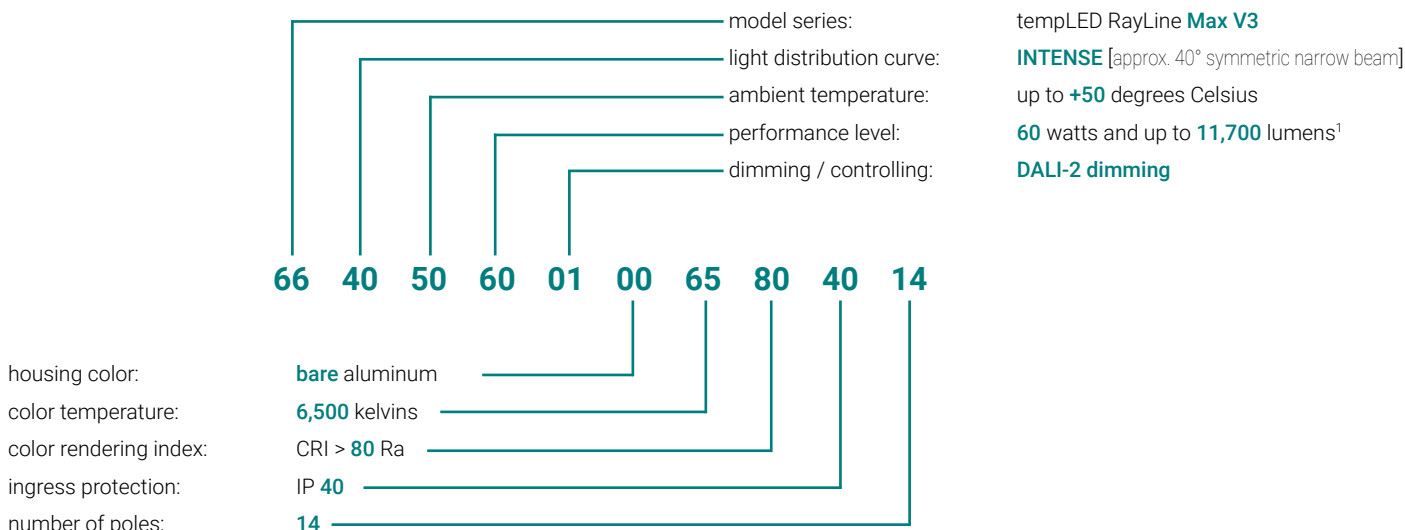









tempLED RayLine Max V3 - this is how you order your line light: sample article number















tempLED RayLine Max V3 - all variants and options at a glance: article number matrix


model series:	66									tempLED RayLine Max V3
light distribution curve:		20								ASY [left-sided approx. 20° asymmetric narrow beam]
		21								ASY [right-sided approx. 20° asymmetric narrow beam]
		90								BATWING [approx. 90° symmetric wide beam]
		22								DASY [two-sided approx. 2x20° asymmetric narrow beam]
		11								FLATWIDE [approx. 90° symmetric wide beam]
		40								INTENSE [approx. 40° symmetric narrow beam]
		01								MEDIUM [approx. 60° symmetric narrow beam]
		12								OPAL [approx. 120° symmetric diffuse light distribution]
		10								WIDE [approx. 90° symmetric wide beam]
ambient temperature:			50							-30 to +50 degrees Celsius
			70							-30 to +70 degrees Celsius
performance level:				20						20 watts / up to 4,000 lumens ¹
				35						35 watts / up to 7,000 lumens ¹
				60						60 watts / up to 11,700 lumens ¹
				90						90 watts / up to 16,650 lumens ¹
controlling / dimming:					00					on / off
					01					DALI-2 dimming
					11					constant lumen output (CLO)
housing color:						00				aluminium bare
color temperature:							27			2,700 kelvins
							30			3,000 kelvins
							40			4,000 kelvins (standard color temperature)
							50			5,000 kelvins
							65			6,500 kelvins
color rendering index:								80		CRI > 80 Ra
								90		CRI > 90 Ra
ingress protection:									40	IP 40
									44	IP 44
									55	IP 55
number of poles:									10	10-pole with through-wiring
									12	12-pole with through-wiring
									14	14-pole with through-wiring

¹The specified maximum initial luminous flux depends on the selected colour temperature, the selected colour rendering index and the selected optical system.


tempLED	System components catalogue RayLine Max V3	art.-no.	GTIN / EAN
	rail connector for connecting two mounting rails including a fastening point for steel cable suspension and two rotary knob screws, length: 280 mm, material: aluminium, finish: aluminum bare	065500	4260745235396
	mounting adapter for flexible and freely selectable assembly of new or already installed rope suspensions on the RayLine V3 mounting rails, material: steel, finish: hot-dip galvanized	065501	4260745235402
	ceiling mounting adapter for direct mounting of RayLine V3 mounting rails on ceilings, flexible alignment, distance to surface: approx. 20 mm, material: steel, finish: hot-dip galvanized, delivered as a set with mounting adapter 065501	065502	4260745235419
	screw hook, size M6 for direct mounting of RayLine V3 mounting rails on newly installed or already existing chain suspensions, max. opening: 15 mm, with safety lock, material: steel, finish: nickel-plated, for use with 065500 or 065501	090129	4260745233767
	rope suspension with loop material: steel, finish: galvanized, for use with 065500 or 065501 rope length: 1.00 m , adjustable suspension length: from 0.10 to 0.90 m rope length: 3.00 m , adjustable suspension length: from 0.10 to 2.90 m rope length: 5.00 m , adjustable suspension length: from 0.10 to 4.90 m	065520 065521 065522	4260745235631 4260745235648 4260745235655
	rope suspension with carabiner hook material: steel, finish: galvanized, for use with 065500 or 065501 rope length: 1.00 m , adjustable suspension length: from 0.10 to 0.90 m rope length: 3.00 m , adjustable suspension length: from 0.10 to 2.90 m rope length: 5.00 m , adjustable suspension length: from 0.10 to 4.90 m	065523 065524 065525	4260745235662 4260745235679 4260745235686
	rope suspension with trapezoidal sheet hook material: steel, finish: galvanized, for use with 065500 or 065501 rope length: 1.00 m , adjustable suspension length: from 0.10 to 0.90 m rope length: 3.00 m , adjustable suspension length: from 0.10 to 2.90 m rope length: 5.00 m , adjustable suspension length: from 0.10 to 4.90 m	065526 065527 065528	4260745235693 4260745235709 4260745235716
	rope suspension with concrete anchor material: steel, finish: galvanized, for use with 065500 or 065501 rope length: 1.00 m , adjustable suspension length: from 0.10 to 0.90 m rope length: 3.00 m , adjustable suspension length: from 0.10 to 2.90 m rope length: 5.00 m , adjustable suspension length: from 0.10 to 4.90 m	065529 065530 065531	4260745235723 4260745235730 4260745235747
	start or end feed as a kit, 14-pole set for self-assembly, for feeding in at the beginning or the end of the RayLine Max V3 line lighting system, two cable glands integrated at the front in size M32 without connection cable integrated in a mounting rail, length: 140 mm, material: aluminium, finish: aluminum bare start feed end feed	066501 066502	4260745237741 4260745237864
	center feed as a kit, 2 x 14-pole set for self-assembly, for feeding in in the center of the RayLine Max V3 line lighting system, four cable glands integrated on the top in size M25, not suitable for use with ceiling mounting adapter 065502, without connection cables integrated in a mounting rail, length: 280 mm, material: aluminium, finish: aluminum bare without through-wiring with through-wiring	066503 066504	4260745237611 4260745237628
	supply cable, 7-pole, suitable for all feed systems 7-pole connection cable, ready-for-use, for tempLED RayLine line lighting systems, cable version: 7G2.5, outer diameter: 11.1 mm, cable colour: grey, required quantities: 1x each for the start and end feeds and 2x each for the center feeds length: 1.00 meter length: 3.00 meters length: 5.00 meters	699038 699039 699040	4260745233088 4260745233095 4260745233101
	connection cable set as a kit, 2 x 7-pole connection cable set for self-assembly between two linear luminaire systems for self-assembly, for example for bridging roof beams of roof girders, ventilation shafts, cable stays or similar on-site installations, cable version: 7G2.5, outer diameter: 11.1 mm, cable colour: grey, delivery includes one start- and one end feed for self-assembly length: 1.00 meter length: 3.00 meters length: 5.00 meters	066516 066517 066518	4260745237710 4260745237727 4260745237734

tempLED	Accessory catalogue RayLine Max V3	art.-no.	GTIN / EAN
	universal adapter for mounting e.g. hall lights on the RayLine Max V3 line lighting system, maximum load capacity: 25 kg, material: steel, finish: hot-dip galvanized	065081	4260745235495
	small universal adapter for mounting e.g. information signs and traffic mirrors on the RayLine Max V3 line lighting system, maximum load capacity: 3 kg, material: steel, finish: hot-dip galvanized	066515	4260745237703
	universal power output, 5-pole universal power supply output for the RayLine Max V3 line lighting system, 5-pole socket, maximum load capacity: 230 VAC, 50/60 Hz - 10 A integrated in a mounting rail, length: 140 mm, material: aluminium, finish: aluminum bare with pin assignment 1 / 2 / 5 / 6 with pin assignment 1 / 2 / 3 / 4 with pin assignment 3 / 4 / 5 / 6	066505 066506 066507	4260745237635 4260745237642 4260745237659
	integrated universal power output, 5-pole technical data similar to the universal power output, but for fully integrated installation in a free blind module of the tempLED RayLine Max V3 line lighting system with pin assignment 1 / 2 / 5 / 6 with pin assignment 1 / 2 / 3 / 4 with pin assignment 3 / 4 / 5 / 6	065544 065545 065546	4260745237765 4260745237833 4260745237840
	universal power output LITE, 5-pole universal power supply output for the RayLine Max V3 line lighting system, 5-pole output cable approx. 40 cm long, maximum load capacity: 230 VAC, 50/60 Hz - 10 A, fully integrated installation in a free blind module of the tempLED RayLine Max V3 line lighting system with pin assignment 1 / 4 / 5 / 6 with pin assignment 8 / 9 / 10 / 11	065550 066524	4260669190184 4260669190191
	motion- and light SensorSystem tempLED RayControl combined motion detector and light sensor system for the tempLED RayLine Max V3 line lighting system with integrated DALI dimming, power supply and data exchange via the DALI control cables, maximum cable length: 300 meters, can be used at ambient temperatures from -20 to +45 degrees Celsius		
	SensorSystem MASTER motion detector with passive infrared (PIR) technology, detection angle: 360 degrees, integrated light sensor with measuring range from 2 to 2,000 lux, combined with a SensorSystem Control- Box to supply power to the sensors and evaluate the sensor signals, programming and control via Bluetooth and app, Bluetooth range: max. 15 meters, maximum controllable number of DALI light modules: 32, maximum additional number of sensors that can be evaluated and supplied: 3, integrated real-time clock (RTC) with 72-hour power blackout backup. Integrated in a mounting rail, length: 280 mm, material: aluminium, finish: aluminum bare. maximum mounting height: 3.50 meters, maximum detection range: Ø 12 meters maximum mounting height: 12.00 meters, maximum detection range: Ø 12 meters maximum mounting height: 17.00 meters, maximum detection range: Ø 18 meters maximum mounting height: 15.00 meters, maximum detection range: 30 x 12 meters	066537 066534 066508 066547	4262493352172 4262493352158 4260745237772 4262493352493
	SensorSystem SLAVE motion detector with passive infrared (PIR) technology, detection angle: 360 degrees, photoelec- tric sensor with measuring range from 2 to 2,000 lux, power supply and evaluation either via the SensorSystem ControlBox or the SensorSystem MASTER via the DALI control lines. Integrated in a mounting rail, length: 140 mm, material: aluminium, finish: aluminum bare. maximum mounting height: 3.50 meters, maximum detection range: Ø 12 meters maximum mounting height: 12.00 meters, maximum detection range: Ø 12 meters maximum mounting height: 17.00 meters, maximum detection range: Ø 18 meters maximum mounting height: 15.00 meters, maximum detection range: 30 x 12 meters	066538 066535 066509 066548	4262493352189 4262493352165 4260745237796 4262493352509
	integrated SensorSystem MASTER technical data similar to SensorSystem MASTER, but for fully integrated installation in a free blind module of the tempLED RayLine Max V3 line lighting system. maximum mounting height: 3.50 meters, maximum detection range: Ø 12 meters maximum mounting height: 12.00 meters, maximum detection range: Ø 12 meters maximum mounting height: 17.00 meters, maximum detection range: Ø 18 meters maximum mounting height: 15.00 meters, maximum detection range: 30 x 12 meters	065566 065563 065542 065582	4262493352134 4262493352110 4260745237802 4262493352486
	integrated SensorSystem SLAVE technical data similar to SensorSystem SLAVE, but for fully integrated installation in a free blind module of the tempLED RayLine Max V3 line lighting system. maximum mounting height: 3.50 meters, maximum detection range: Ø 12 meters maximum mounting height: 12.00 meters, maximum detection range: Ø 12 meters maximum mounting height: 17.00 meters, maximum detection range: Ø 18 meters maximum mounting height: 15.00 meters, maximum detection range: 30 x 12 meters	065567 065564 065543 065583	4262493352141 4262493352127 4260745237758 4262493352462
	important notice: the tempLED RayControl (integrated) SensorSystem SLAVE can only be opera- ted in conjunction with a(n) (integrated) SensorSystem MASTER or an external DALI network with an appropriate power supply (10 to 22.5 VDC, 6 mA each).		

tempLED	Accessory catalogue RayLine Max V3	art.-no.	GTIN / EAN
	<p>emergency light module with automatic detection of failure and return of supply voltage, display of functional status, battery type: LiFePO4, running time approx. 3 hours with an output power of approx. 3 watts, recharging time: approx. 24 hours, can only be used at ambient temperatures of +5 to +50 degrees Celsius, mounted in the luminaire ready for use important notice: line lights with integrated DALI dimming enable data exchange and control (e.g. status messages and test function) via an external DALI network.</p>	065534	4260745236683
	<p>emergency power module for centralized battery systems operation module without monitoring and addressing for centralized battery systems, suitable for all tempLED RayLine Max V3 line lights with integrated DALI dimming, controlling via central monitoring system, maximum switching capacity: 500 watts, power output in emergency mode: 15 per cent of nominal power, can only be used at ambient temperatures of max. +50 degrees Celsius, mounted in a luminaire ready for use</p>	699015	4260669198999
	<p>LEDelligence PIR motion detector suitable only for luminaires with DALI dimming motion detector in passive infrared (PIR) technology, detection angle: 360 degrees, integrated light sensor with measuring range up to 1,000 lux for activation of the PIR motion detector, maximum controllable number of DALI light modules: 32, protection class: IP 65, power supply: 220 - 240 VAC, 50/60 Hz, can only be used at ambient temperatures of 0 to +50 degrees Celsius. Programming and control via Bluetooth mesh network and app. Integrated in a mounting rail, length: 140 mm, material: aluminium, finish: aluminum bare. maximum mounting height: 3.50 meters, maximum detection range: Ø 12 meters maximum mounting height: 12.00 meters, maximum detection range: Ø 12 meters maximum mounting height: 17.00 meters, maximum detection range: Ø 18 meters</p>	778050 778047 778053	4262493352028 4262493351991 4262493352059
	<p>Integrated LEDelligence PIR motion detector suitable only for luminaires with DALI dimming motion detector in passive infrared (PIR) technology, detection angle: 360 degrees, integrated light sensor with measuring range up to 1,000 lux for activation of the PIR motion detector, maximum controllable number of DALI light modules: 32, protection class: IP 65, power supply: 220 - 240 VAC, 50/60 Hz, can only be used at ambient temperatures of 0 to +50 degrees Celsius. Programming and control via Bluetooth mesh network and app. For fully integrated installation in a free blind module of the tempLED RayLine Max V3 line lighting system. maximum mounting height: 3.50 meters, maximum detection range: Ø 12 meters maximum mounting height: 12.00 meters, maximum detection range: Ø 12 meters maximum mounting height: 17.00 meters, maximum detection range: Ø 18 meters</p>	778051 778048 778054	4262493352035 4262493352004 4262493352066
	<p>DALI interrupter special module for the tempLED RayLine Max V3 line lighting system for interrupting the DALI circuit. Integrated in a mounting rail, length: 140 mm, material: aluminium, finish: aluminum bare.</p>	066527	4262493352202



Direct link to the tempLED
download portal



Direct link to the tempLED-
product configurator



LED is sustainable.
LED is the future.

tempLED luminaires fulfil a recycling rate of > 90%.
That is our product promise to you.

When will you start?